



Automatically Diagnoses, Recovers, Charges & Maintains Your Batteries!
Now that's Smart...Wicked Smart!





The G1100 is a smart, 7 Step, fully automatic switch-mode battery charger and maintainer. The G1100 is best for small battery applications from 2.2-40Ah, such as charging your Motorcycle, ATV, Jet Ski or Snowmobile. In addition to charging, the G1100 can effectively maintain any 6V or 12V batteries in larger applications, such as Cars, RVs, Boats and Trucks.


Wicked Smart Features


- 


6V/12V COMPATIBILITY
Charges 6V & 12V batteries
- 


MULTIPLE BATTERY CHEMISTRY
Safely charges Wet, Gel, MF & AGM batteries
- 


VARIABLE INPUT COMPENSATED
100% full charge even with varying A/C input voltages
- 


AUTO-MEMORY
Returns to last selected mode when restarted
- 


EXTENDABLE CONNECTORS
Plug-n-play connectors for easy accessory changes
- 


ABNORMALITY PROTECTION
Automatically shuts "off" if charger remains in Bulk charge mode for an extended period of time
- 

FULLY INTERACTIVE
Automatically adjusts itself to changing current needs
- 

HF/HE SWITCH MODE DESIGN
High-frequency, high-efficiency for a lightweight, compact charger
- 

RECOVERY MODE
Recovers deeply discharged & sulphated batteries with pulse charging
- 

DESIGNED FOR SAFETY
Reverse polarity, short circuit, open circuit, spark proof, overheat, overcurrent & overcharge
- 

RAPID CHARGING TECHNOLOGY
Charges batteries 2X faster than traditional linear battery chargers
- 

COLD/AGM MODE
Optimized charge mode for cold weather or AGM batteries

NOCO VosFX Processor

The VosFX Processor is a revolutionary smart processor utilizing sophisticated levels of intelligence to alter the charge process, based on organic feedback from the battery, to extend battery life. The VosFX Processor quickly and efficiently makes decisions on how to charge the battery without risking user safety or damage to the battery.

POWERED BY




G1100 1.1A (1100mA) 6V & 12V

Multi-Purpose Battery Charger



Automatically Diagnoses, Recovers,
Charges & Maintains Your Batteries!
Now that's Smart...Wicked Smart!

Charging Steps

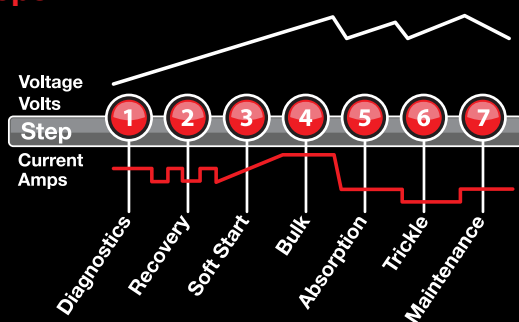

Step 1: Diagnostics

Checks the battery voltage to make sure battery connections are good and the battery is in a stable condition before beginning the charge process.

Step 2: Recovery

Initializes the Recovery process, if needed, for deeply discharged or sulfated (desulfation) batteries by pulsing small amounts of current.

Step 3: Soft Start

Begins Bulk charging process with a gentle (soft) charge.

Step 4: Bulk

The Bulk charging process continues and returns 80% of the battery capacity. Indicated by the 25%, 50% and 75% CHARGE LEDs.

Step 5: Absorption

Brings the charge level to 90%. The battery charger will deliver small amounts of current to provide a safe, efficient charge and limit battery gassing.

Step 6: Trickle

Battery is fully charged and ready to use, indicated by the 100% CHARGE LED being a solid Green. In this step, the battery charger will only deliver enough current to keep the battery full. If the battery tells the charger that more current is needed, the battery charger will switch to Maintenance.

Step 7: Maintenance

Continuously monitors the battery voltage to determine if a maintenance charge should be initiated. If the terminal voltage falls below 6.4V (6V) and 12.8V (12V), the charger will start the Maintenance cycle until voltage reaches 7.2V (6V) and 14.4V (12V) and then discontinues the charge cycle. The cycle between Trickle and Maintenance is repeated indefinitely to keep the battery at full charge, without overcharging. The battery charger can be left connected indefinitely.

Technical Specifications

Input Voltage AC	110-120 VAC, 50-60Hz
Working Voltage AC	85-130 VAC, 50-60Hz
Input Current	600mA RMS Max
Efficiency	85% Approx.
Power	30W Max
Charging Voltage	7.2/14.4, 7.4/14.7V (Cold/AGM)
Charging Current	1100mA
Back Current Drain	<5mA
Ripple	<2%
Charger Type	7 Step, Fully Automatic, Switch-Mode
Type of Batteries	6V & 12V Lead-Acid
Battery Chemistries	Wet, Gel, MF & AGM
Battery Capacity	2.2-40Ah, up to 150Ah for Maintenance
Housing Protection	IP65
Cooling	Natural Convection
Noise Level	<50 dB
Dimensions (L x W x H)	6.1 x 2.5 x 1.6 Inches
Weight	0.8 Pounds

5 Year Limited Warranty

What's In The Box

- G1100 Charger
- Battery Clamp Connectors
- Eyelet Terminal Connectors
- Owner's Manual & User Guide



NOCO
genius
wicked smart chargers™

Follow Us At:



Safely Charges Wet, Gel,
MF & AGM Batteries
geniuschargers.com