





UB1213 (12V1.3Ah)

NOTE



PHYSICAL SPECIFICATIONS

Nominal Voltage Nominal Capacity (20HR)		12V 1.3 Ah
Dimensions	Length Width Height Total Height	97 +/-1mm(3.82 inches) 43 +/-1mm(1.69 inches) 52 +/-2mm(2.05 inches) 57 +/-2mm(2.24 inches)
Weight		Approx. 0.58 kg (1.28lbs)
Standard Terminal		F1 – Faston Tab No.170

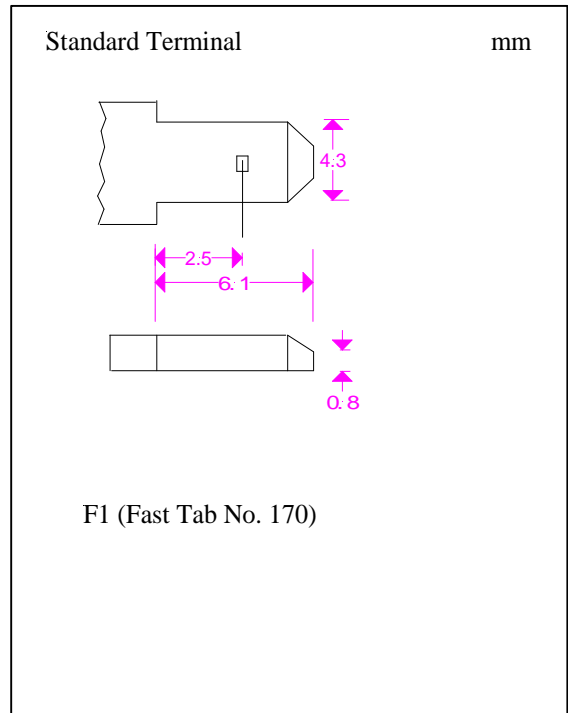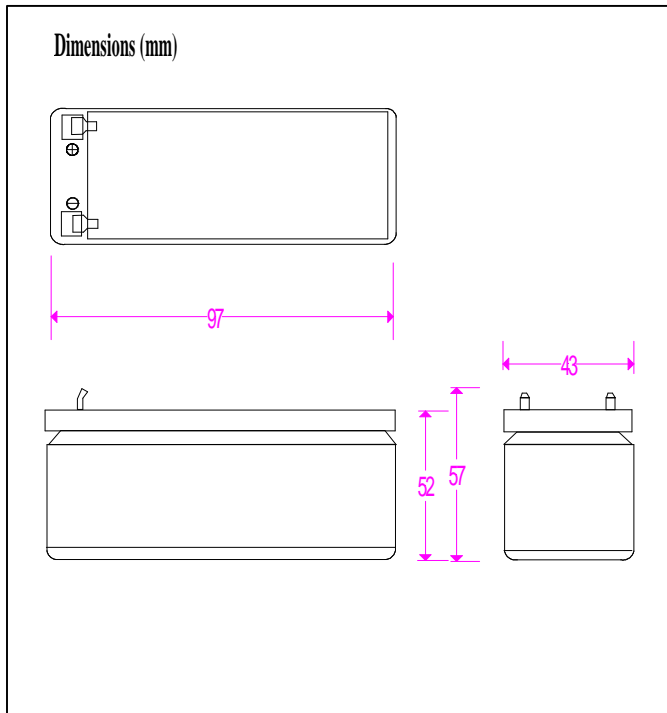



UB1213 (12V1.3Ah)

ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.06A)	1.3 Ah	Max. Discharge Current (5 sec.)		15A
	10 hour rate (0.11A)	1.1 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 0.36A Voltage 14.40V ~ 15.00V at 20°C(68°F) Temp. Coefficient-30mV/°C
5 hour rate (0.19A)	0.95 Ah				
1 hour rate (0.72A)	0.72 Ah				
Capacity affected by Temperature	40°C(104°F)	105%	Standby	Initial Charging Current less than 0.36A Voltage 13.50V ~ 13.80V at 20°C (68°F) Temp. Coefficient-20mV/°C	
	20°C(68°F)	100%			
	0°C(32°F)	85%			
Internal Resistance Fully charged battery (20°C, 68°F) 100milliohms					

