





UB1222 (12V2.2Ah)

NOTE



PHYSICAL SPECIFICATIONS

Nominal Voltage Nominal Capacity (20HR)		12V 2.2 Ah
Dimensions	Length Width Height Total Height	178 +/-1mm(7.01 inches) 35 +/-1mm(1.38 inches) 62 +/-2mm(2.44 inches) 68 +/-2mm(2.68 inches)
Weight		Approx. 0.93 kg (2.05lbs)
Standard Terminal		F1 – Faston Tab No.170

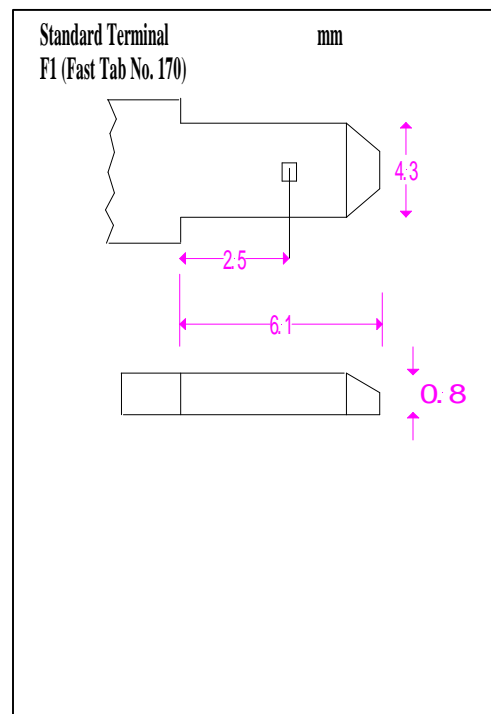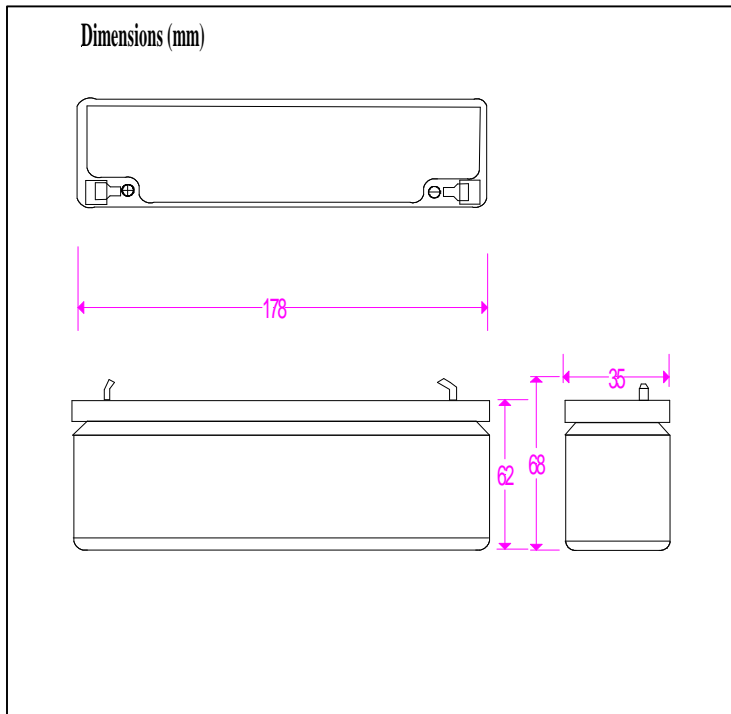



UB1222 (12V2.2Ah)

ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.1A)	2.2 Ah	Max. Discharge Current (5 sec.)		20A
	10 hour rate (0.18A)	1.8 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 0.6A Voltage 14.40V ~ 15.00V at 20°C(68°F) Temp. Coefficient-30mV/°C
5 hour rate (0.32A)	1.6 Ah				
	1 hour rate (1.2A)	1.2 Ah		Standby	Initial Charging Current less than 0.6A Voltage 13.50V ~ 13.80V at 20°C (68°F) Temp. Coefficient-20mV/°C
Capacity affected by Temperature	40°C(104°F)	105%	Internal Resistance Fully charged battery (20°C, 68°F) 90milliohms		
	20°C(68°F)	100%			
	0°C(32°F)	85%			

