




UB4.5-6WL (6V4.5Ah)

Note



PHYSICAL SPECIFICATIONS

Nominal Voltage Nominal Capacity (20HR)		6V 4.5 Ah
Dimensions	Length Width Height	70 +/-1mm(2.76 inches) 47 +/-1mm(1.83 inches) 101 +/-2mm(3.98 inches)
Weight		Approx. 0.85 kg (1.876lbs)

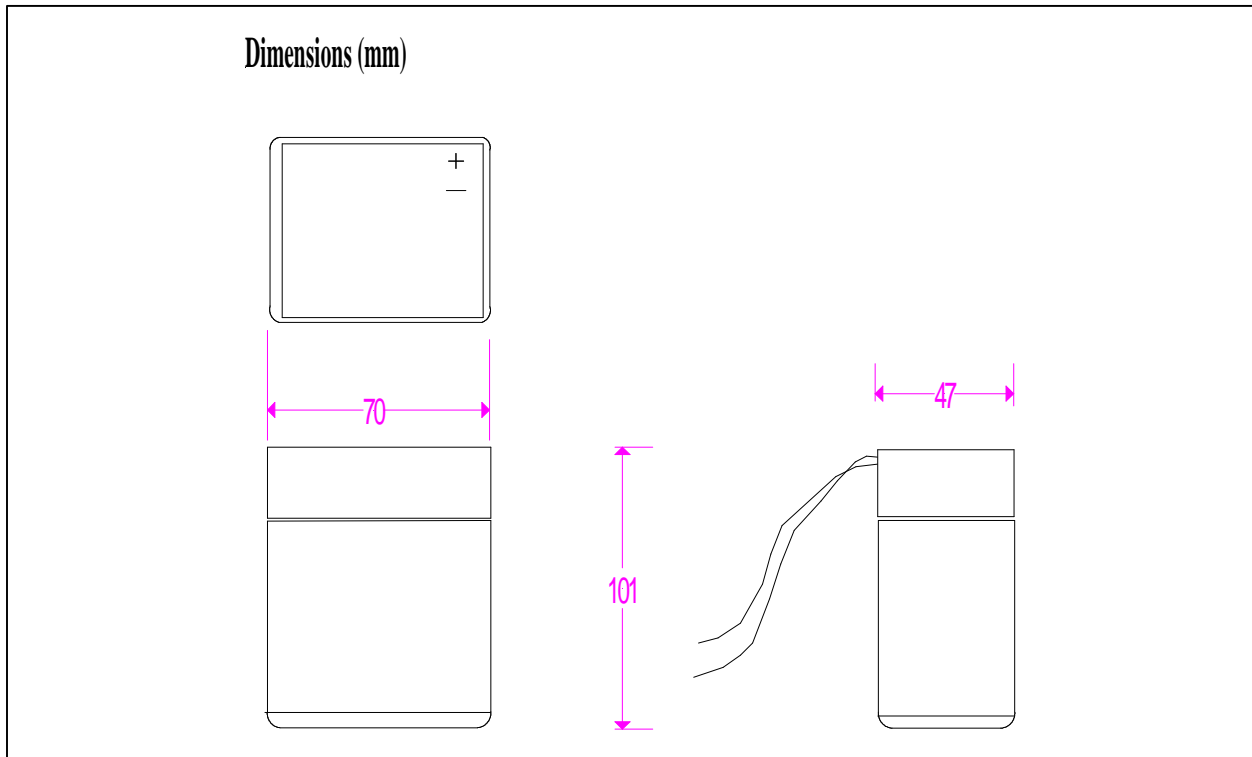



UB4.5-6WL (6V4.5Ah)

ELECTRICAL SPECIFICATIONS

Capacity	0.05C (0.2A To 5.25V) 4Ah		Max. Discharge Current (5 sec.) 20A				
	0.1C (0.4A To 5.25V) 4Ah		Max Charge Current 1.2A				
	0.2C (0.8A To 5.10V) 3.2Ah		Vibration Test : No Capacity or Performance Degradation Phenomenon				
1C (4A To 4.8V) 1.8Ah							
Capacity affected by Temperature	40°C(104°F)	105%	Cycle Service Life Charge 32°F (0°C) To 104°F(40°C) Discharge -4°F(-20°C) To 122°F(50°C) Storage -4°F(-20°C) To 104°F(40°C)				
	20°C(68°F)	100%					
0°C(32°F)			85%				
Internal Resistance Approx. 16 milliohms			<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"><u>Case Material</u></td> <td style="text-align: center;"><u>Terminal</u></td> </tr> <tr> <td style="text-align: center;">ABS</td> <td style="text-align: center;">Wire</td> </tr> </table>	<u>Case Material</u>	<u>Terminal</u>	ABS	Wire
<u>Case Material</u>	<u>Terminal</u>						
ABS	Wire						

