

41-7107UPS

**HIGH
RATE
SERIES**

**UPS12-170 VALVE REGULATED
LEAD ACID BATTERY**

FOR UPS STANDBY POWER APPLICATIONS

**12V 50 AH @ 20 HR RATE,
12V 170 WATTS/CELL @ 15 MIN. RATE**



FEATURES

- 10 Year design life @ 25°C (77°F)
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance.
- Patented flame-arresting one-way pressure-relief vent providing vacuum and controlled backpressure for long life recombinant operation.
- Designed to comply with ANSI and Eurobat battery standards.
- Specifically designed for optimum performance in UPS applications.
- Proprietary computer modeled radial grid matrix using multiple conductors for providing the lowest internal resistance and highest current carrying efficiency.
- Proprietary Fixed Orifice Pasting technology applying active material on both sides of the grid for consistent cell-to-cell performance, highest paste packing efficiency and uniform grid protection.
- Lowest calcium levels among battery manufactures minimizing grid growth and extended battery life.
- UL-recognized component.
- Thermally welded case-to-cover bond to eliminate leakage.
- Can be mounted in any orientation. Upright, side, or end mounting recommended.
- Not restricted for air transport – Complies with IATA/ICAO Special Provision A67.
- Not restricted for surface transport – Classified as non-hazardous material as related to DOT-CFR Title 49 parts 171-189.
- Flame retardant polypropylene case and cover compliant with UL 1778 (optional).

SPECIFICATIONS


12 Volts – 170 Watts Per Cell For 15 Minutes to 1.67 Volts per Cell

Constant Power Discharge Ratings – Watts Per Cell @ 77°F (25°C)

Operating Time to End Point Voltage (in Minutes)

End Point Volts/Cell	5	10	15	20	30	40	45	50	60	90
1.67	270	206	170	141	106	87	80	74	65	47

41-7107UPS

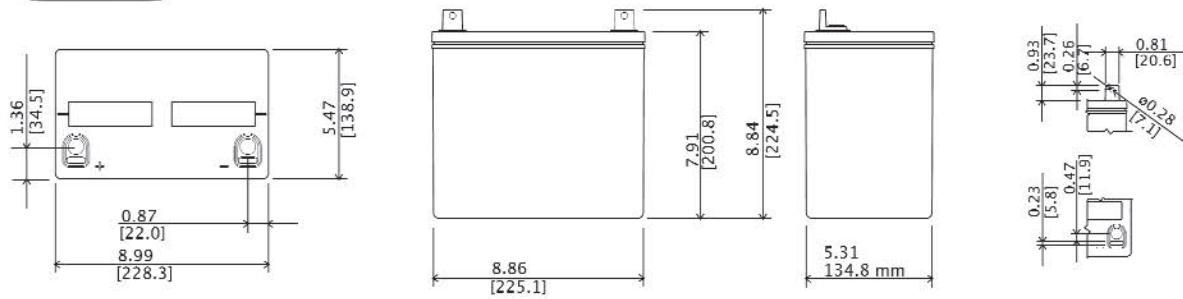

SPECIFICATIONS

Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum Discharge Current	Short Circuit Current	Ohms Imped. 60 Hz (Ω)
6	12.84	40 lbs. 18 kg	Absorbed H ₂ SO ₄ SG = 1.300	600 Amps	2500 Amps @ 0.1 sec.	0.0060 Ohms

Capacity	170 watts per cell at the 15 minute rate to 1.67 volts per cell at 77°F (25°C). 50 Ah @ 20 hr. rate to 1.75 volts per cell @ 77°F (25°C). 44.8 Ah @ 10 hr. rate to 1.80 volts per cell @ 68°F (20°C).
Operating Temperature Range	Discharge; -40°F (-40°C) to +160°F (71°C), Charge; -10°F (-23°C) to +140°F (60°C). (with temperature compensation)
Nominal Operating Temperature Range	+74°F (23°C) to +80°F (27°C).
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 77°F (25°C).
Recommended Maximum Charging Current Limit	C/5 amperes (10.0 amperes @ 100% depth of discharge) @ 20 hour rate
Equalization and Cycle Service Charging Voltage	14.4 to 14.8 VDC/unit average at 77°F (25°C).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 2.5 amperes rms (C/20).
Self Discharge	Dynasty UPS batteries may be stored for up to 6 months at 77°F (25°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors, racks and cabinet systems are available.
Terminal	"L" terminal with 0.28" clearance hole to accept 0.25" (6mm) bolt.
Terminal Hardware Initial Torque	40 in.-lbs. (4.5 N-m).
Terminal Hardware Annual Retorque	32 in.-lbs. (3.48 N-m).

Constant Power Discharge Ratings – Watts Per Cell @ 77°F (25°C)

Operating Time to End Point Voltage (in minutes)

End Point Volts/Cell	5	10	15	20	30	40	45	50	60	90
1.75	240	189	157	134	101	83	76	71	62	45
1.70	255	198	161	138	104	85	78	73	64	47
1.67	270	206	170	141	106	87	80	74	65	47
1.65	281	213	172	145	108	88	81	75	66	48
1.60	290	220	176	147	110	90	83	77	68	49

Constant Current Discharge Ratings – Amperes @ 77°F (25°C)

Operating Time to End Point Voltage (in hours)

End Point Volts/Cell	.083	.25	.50	.75	1	2	3	5	8	10	12	20	24	72	100
1.90	75	56	42	32	26.2	16.5	12.2	7.83	5.20	4.27	3.60	2.23	1.88	0.66	0.49
1.85	95	75	47	35	28.0	17.5	12.7	8.05	5.35	4.43	3.75	2.33	1.97	0.69	0.50
1.80	115	72	50	37	30.0	18.1	13.0	8.23	5.53	4.57	3.88	2.45	2.06	0.71	0.51
1.75	130	82	52	39	31.5	18.5	13.2	8.45	5.69	4.69	3.98	2.50	2.10	0.72	0.52

Note: Batteries to be mounted with 0.5 in. (1.25 cm) spacing minimum and free air ventilation. Specifications subject to change without notification.